




### THE BENEFITS :

- Custom-made in our workshop
- Resistant housing : aluminum IP55
- High-intensity LEDs


### Technical specifications

|                                |  |
|--------------------------------|--|
| <b>DIMENSIONS &amp; WEIGHT</b> | <ul style="list-style-type: none"> <li>• Height : 360mm</li> <li>• Width : 360mm</li> <li>• Thickness : 145mm</li> <li>• Other dimensions available : 450x450mm, 750x750mm...</li> </ul> |
| <b>MATERIALS</b>               | <ul style="list-style-type: none"> <li>• Aluminum housing and rear panel</li> <li>• Translucent polycarbonate front panel</li> </ul>   |
| <b>POWER</b>                   | <ul style="list-style-type: none"> <li>• 230V</li> </ul>   |
| <b>LIGHT SOURCE</b>            | <ul style="list-style-type: none"> <li>• High-intensity LEDs</li> <li>• Cross sign : 105 red LEDs</li> <li>• Arrow sign : 78 green LEDs</li> </ul>                                       |
| <b>FIXATION</b>                | <ul style="list-style-type: none"> <li>• Rear rails</li> </ul>   |
| <b>PROTECTION RATING</b>       | <ul style="list-style-type: none"> <li>• IP55</li> </ul>   |
| <b>OPTIONS</b>                 | <ul style="list-style-type: none"> <li>• Signal status check</li> </ul>  |

### DIMENSIONS :

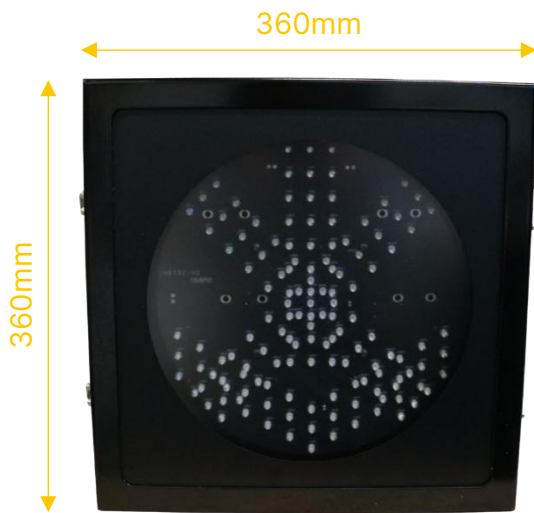

### FIXATION :

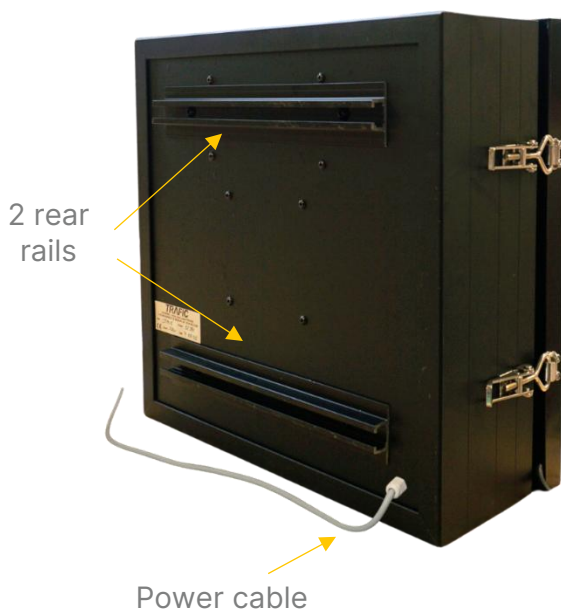

### OPENING :

