



D200 mm

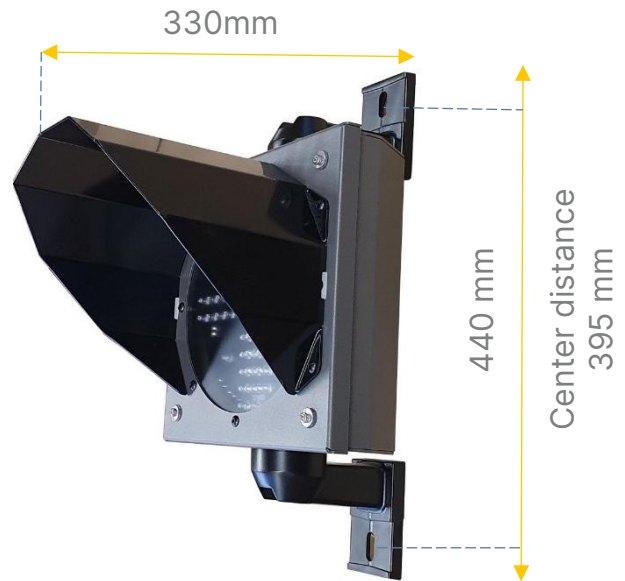

Symbols and colors of your choice

Cable exits through the lower bracket

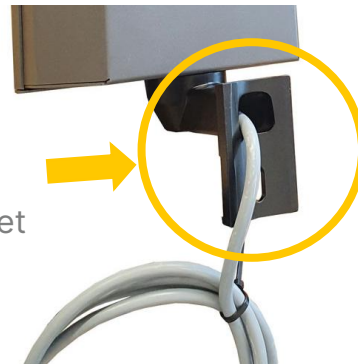

### THE BENEFITS :

- Symbol of your choice
- LED color on request
- Removable visor and adjustable brackets

### Technical specifications

<b>DIMENSIONS &amp; WEIGHT</b>	<ul style="list-style-type: none"> <li>• Height with brackets : 440mm</li> <li>• Diameter : 200mm</li> <li>• Mounting center distance : 395mm</li> </ul>
<b>MATERIALS</b>	<ul style="list-style-type: none"> <li>• Aluminum housing and visor (polycarbonate option available)</li> <li>• Translucent lense</li> </ul>
<b>POWER</b>	<ul style="list-style-type: none"> <li>• 24V or 230V</li> </ul>
<b>LIGHT SOURCE</b>	<ul style="list-style-type: none"> <li>• High-intensity LEDs</li> <li>• Color of your choice : orange, green, red, purple, blue or white</li> <li>• Steady mode</li> </ul>
<b>FIXATION</b>	<ul style="list-style-type: none"> <li>• Mounting with 2 orientable and adjustable brackets</li> <li>• Front opening with 4 screws</li> <li>• Cable exits through the lower bracket</li> </ul>
<b>PROTECTION RATING</b>	<ul style="list-style-type: none"> <li>• IP55 – IK08</li> </ul>

### 24V WIRING DIAGRAM :

