



THE BENEFITS :


- Orientable brackets
- Customizable to your needs
- Manufactured in our workshop

Technical specifications

DIMENSIONS & WEIGHT	<ul style="list-style-type: none"> • Diameter : 200 or 300mm • D200mm : H245 x L250 x T380mm • D300mm : H645 x L265 x T450mm
MATERIALS	<ul style="list-style-type: none"> • Black polycarbonate housing and visor • Translucent lense
POWER	<ul style="list-style-type: none"> • 12V, 24V or 230V • Cable exits through the lower bracket
LIGHT SOURCE	<ul style="list-style-type: none"> • High-intensity LEDs • Color of your choice : orange, green, red, purple, blue or white • Steady or flashing mode
FIXATION	<ul style="list-style-type: none"> • Mounting with two adjustable and orientable brackets • Front opening with 4 screws • D200mm : internal center distance : 215mm / External : 360mm
PROTECTION RATING	<ul style="list-style-type: none"> • IP55 / IK08
OPERATING TEMPERATURE	<ul style="list-style-type: none"> • -20° / +70°



WIRING ACCORDING TO POWER SUPPLY :

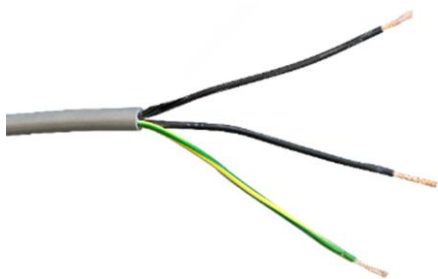


Black (1) = Neutral

Black (2) = Phase

Green/Yellow = Earth

230V

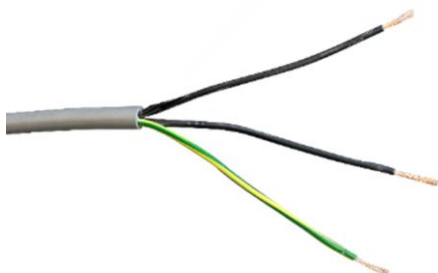

Black (1) = Ground

Black (2) = + red

Green/Yellow = Earth

12/24V