




### THE BENEFITS :

- Manufactured in our workshop
- Removable visor and adjustable support legs
- LED symbol and colors on request


### Technical specifications

<b>DIMENSIONS &amp; WEIGHT</b>	<ul style="list-style-type: none"> <li>• Length : 250mm</li> <li>• Height : 254mm</li> <li>• Thickness : 380mm</li> <li>• Diameter : 200mm (available in D300mm)</li> </ul>
<b>MATERIALS</b>	<ul style="list-style-type: none"> <li>• Black polycarbonate housing and visor</li> <li>• Translucent lens</li> </ul>
<b>POWER</b>	<ul style="list-style-type: none"> <li>• 12V, 24V or 230V</li> <li>• Cable exit from the lower bracket</li> </ul>
<b>LIGHT SOURCE</b>	<ul style="list-style-type: none"> <li>• High-intensity white LEDs</li> <li>• LED colors available : orange, red, green, blue, purple or white</li> <li>• Fixed or flashing mode</li> </ul>
<b>FIXATION</b>	<ul style="list-style-type: none"> <li>• Fixed with two adjustable and orientable brackets</li> <li>• Front opening with 4 screws</li> <li>• Inner center distance : 251mm – Outer center distance : 360mm</li> </ul>
<b>PROTECTION RATING</b>	<ul style="list-style-type: none"> <li>• IP55</li> <li>• IK08</li> </ul>

### DIMENSIONS :

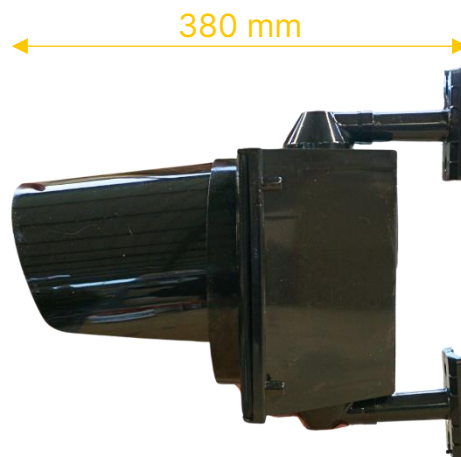


### FIXATION :

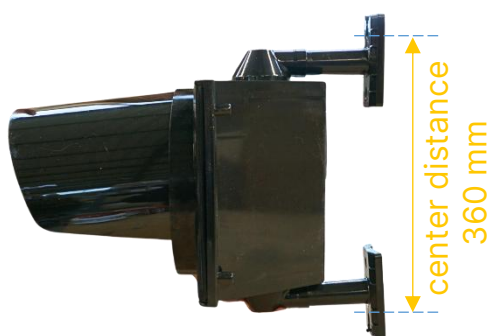

### POWER :

230V

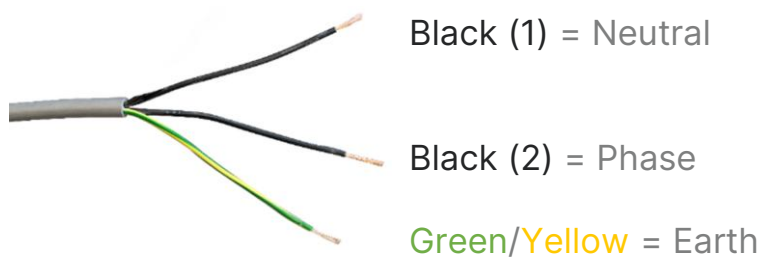

12/24V

