

THE BENEFITS :




- Range : 2000mm during daylight hours
- Wide angle : 3 brightness settings
- Front door : LEDs accessible for maintenance
- Custom manufacturing : other sizes/colors available


Technical specifications

DIMENSIONS & WEIGHT	<ul style="list-style-type: none"> • Width : 750mm • Height : 1000mm • Thickness : 150mm • Weight : 15-20 kg
MATERIALS	<ul style="list-style-type: none"> • Aluminum housing • Translucent polycarbonate door with a blurring effect
POWER	<ul style="list-style-type: none"> • 24V DC
LIGHT SOURCE	<ul style="list-style-type: none"> • 2800 LEDs • Two green LED circuits at the top and bottom • One white LED circuit in the center
FIXATION	<ul style="list-style-type: none"> • 3 mounting rails at the rear • Door opening with hinges and latches
PROTECTION RATING	<ul style="list-style-type: none"> • IP65

DIMENSIONS :

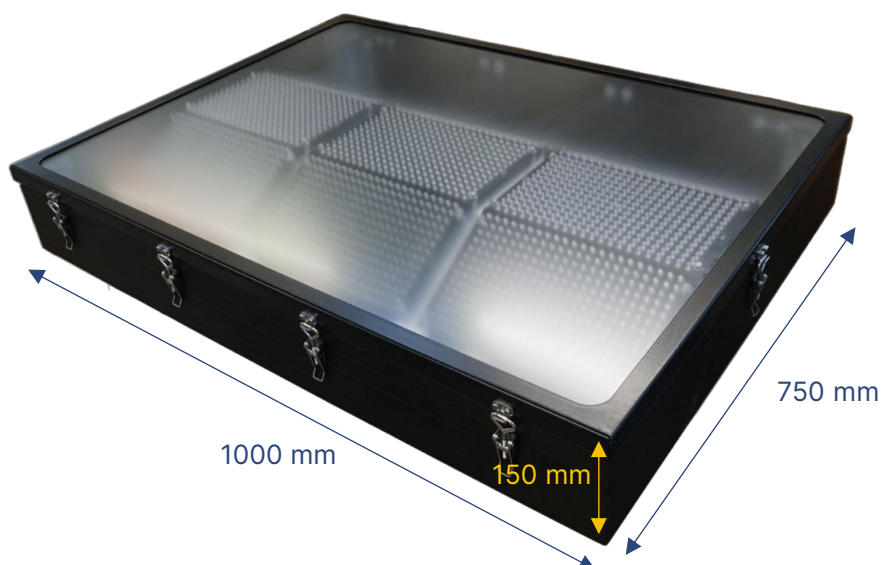


FIXATION :

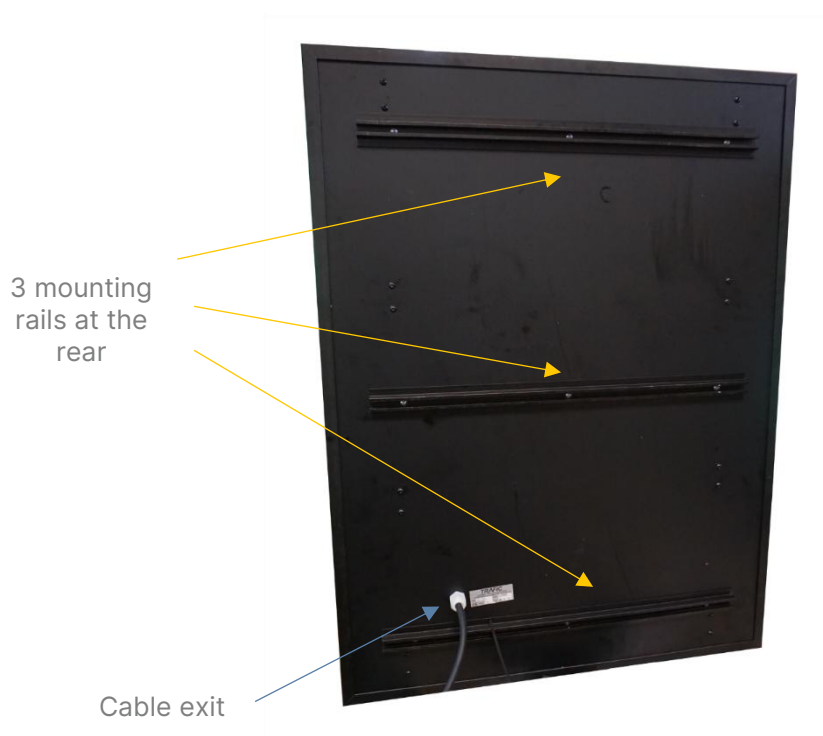

LIGHT SOURCE :

Choosing the number of LED circuits :
1, 2 or 3 simultaneously

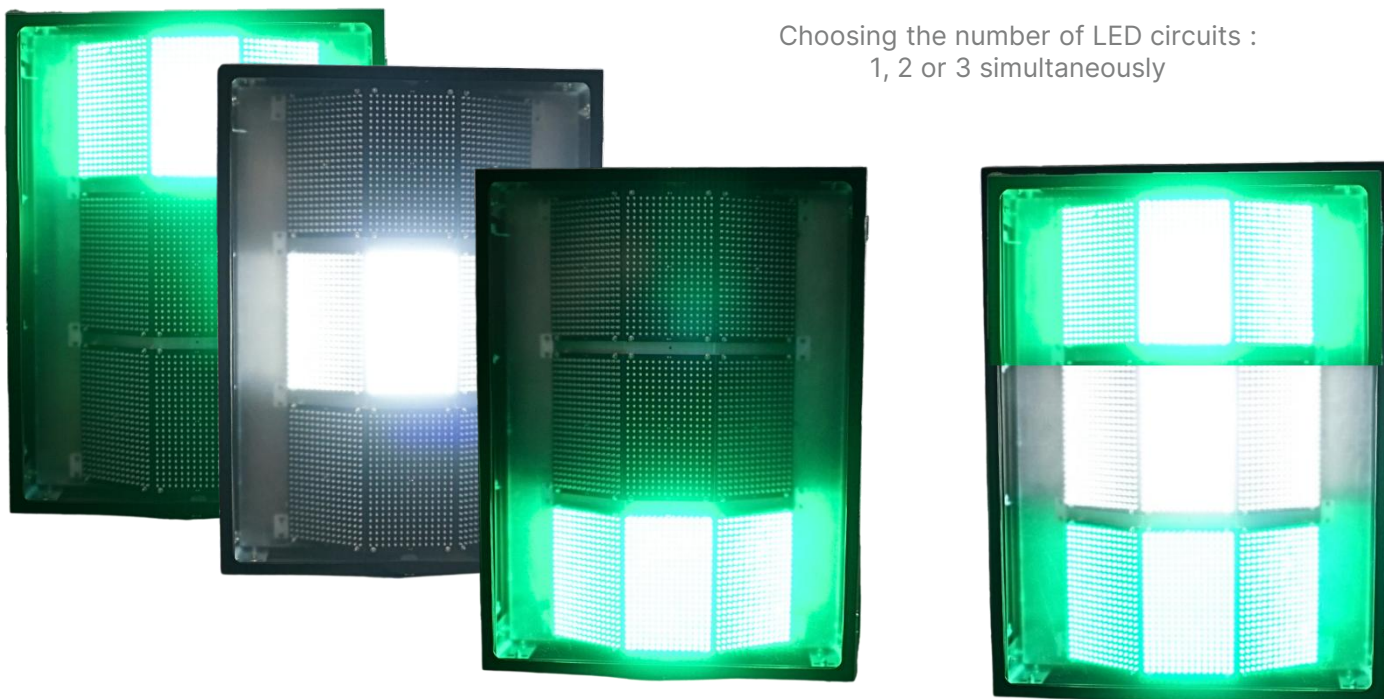

Door at the front of the housing

Accessible LEDs for maintenance

