


THE BENEFITS :


- Custom-made in our workshop
- Excellent visibility thanks to high-intensity LEDs
- Easy to install with 2 rear rails

Technical specifications


DIMENSIONS & WEIGHT	<ul style="list-style-type: none"> • Length : 510mm • Height : 510mm • Thickness : 140mm • Visor (optional) : 130mm • Other dimensions on request
MATERIALS	<ul style="list-style-type: none"> • Aluminum housing • Aluminum visor (optional) with black paint on request • Clear Fresnel lense • Front opening of the housing via stainless steel hinges
POWER	<ul style="list-style-type: none"> • 24V or 230V
LIGHT SOURCE	<ul style="list-style-type: none"> • D450mm light • 250 high-intensity LEDs (color of your choice) • Steady or Flashing mode
FIXATION	<ul style="list-style-type: none"> • Mounting with 2 rear rails • Other mounting options available on request
PROTECTION RATING	<ul style="list-style-type: none"> • IP55 – IK09

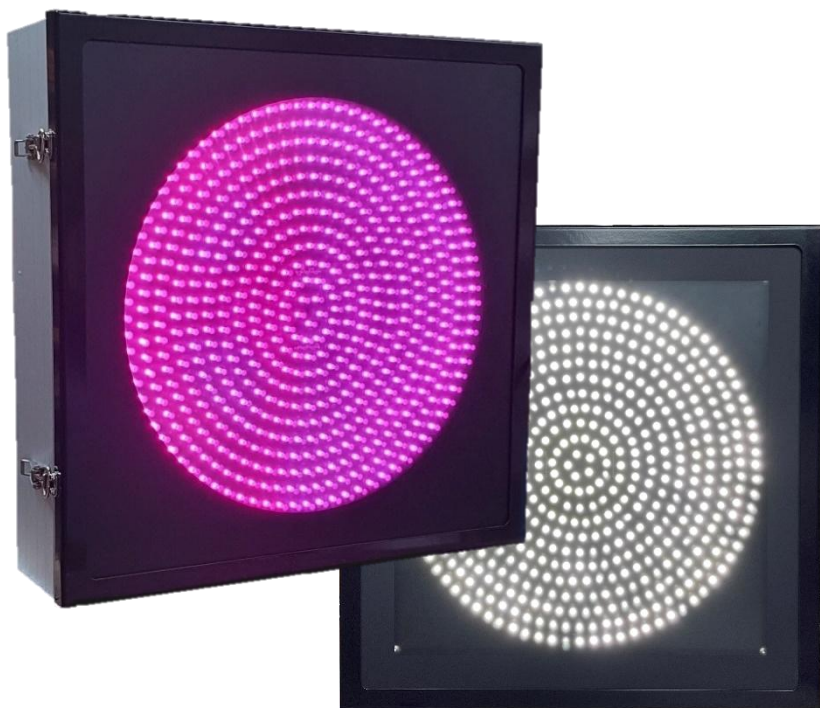

LEDs color of your choice :



Durable aluminum housing

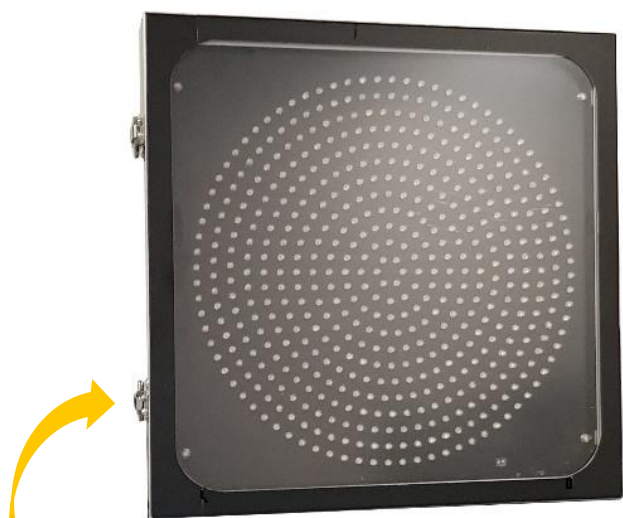

Front opening of the housing via stainless steel hinges



Mounting with 2 rear rails